


KEIP LAS VEGAS, NV BNP-20011105ABC 760 kHz

Nighttime

Electric Field Strength
at 1 km radius
millivolts per meter - mV/m

Power: 0.93 kW
Graph Maximum: 500 mV/m

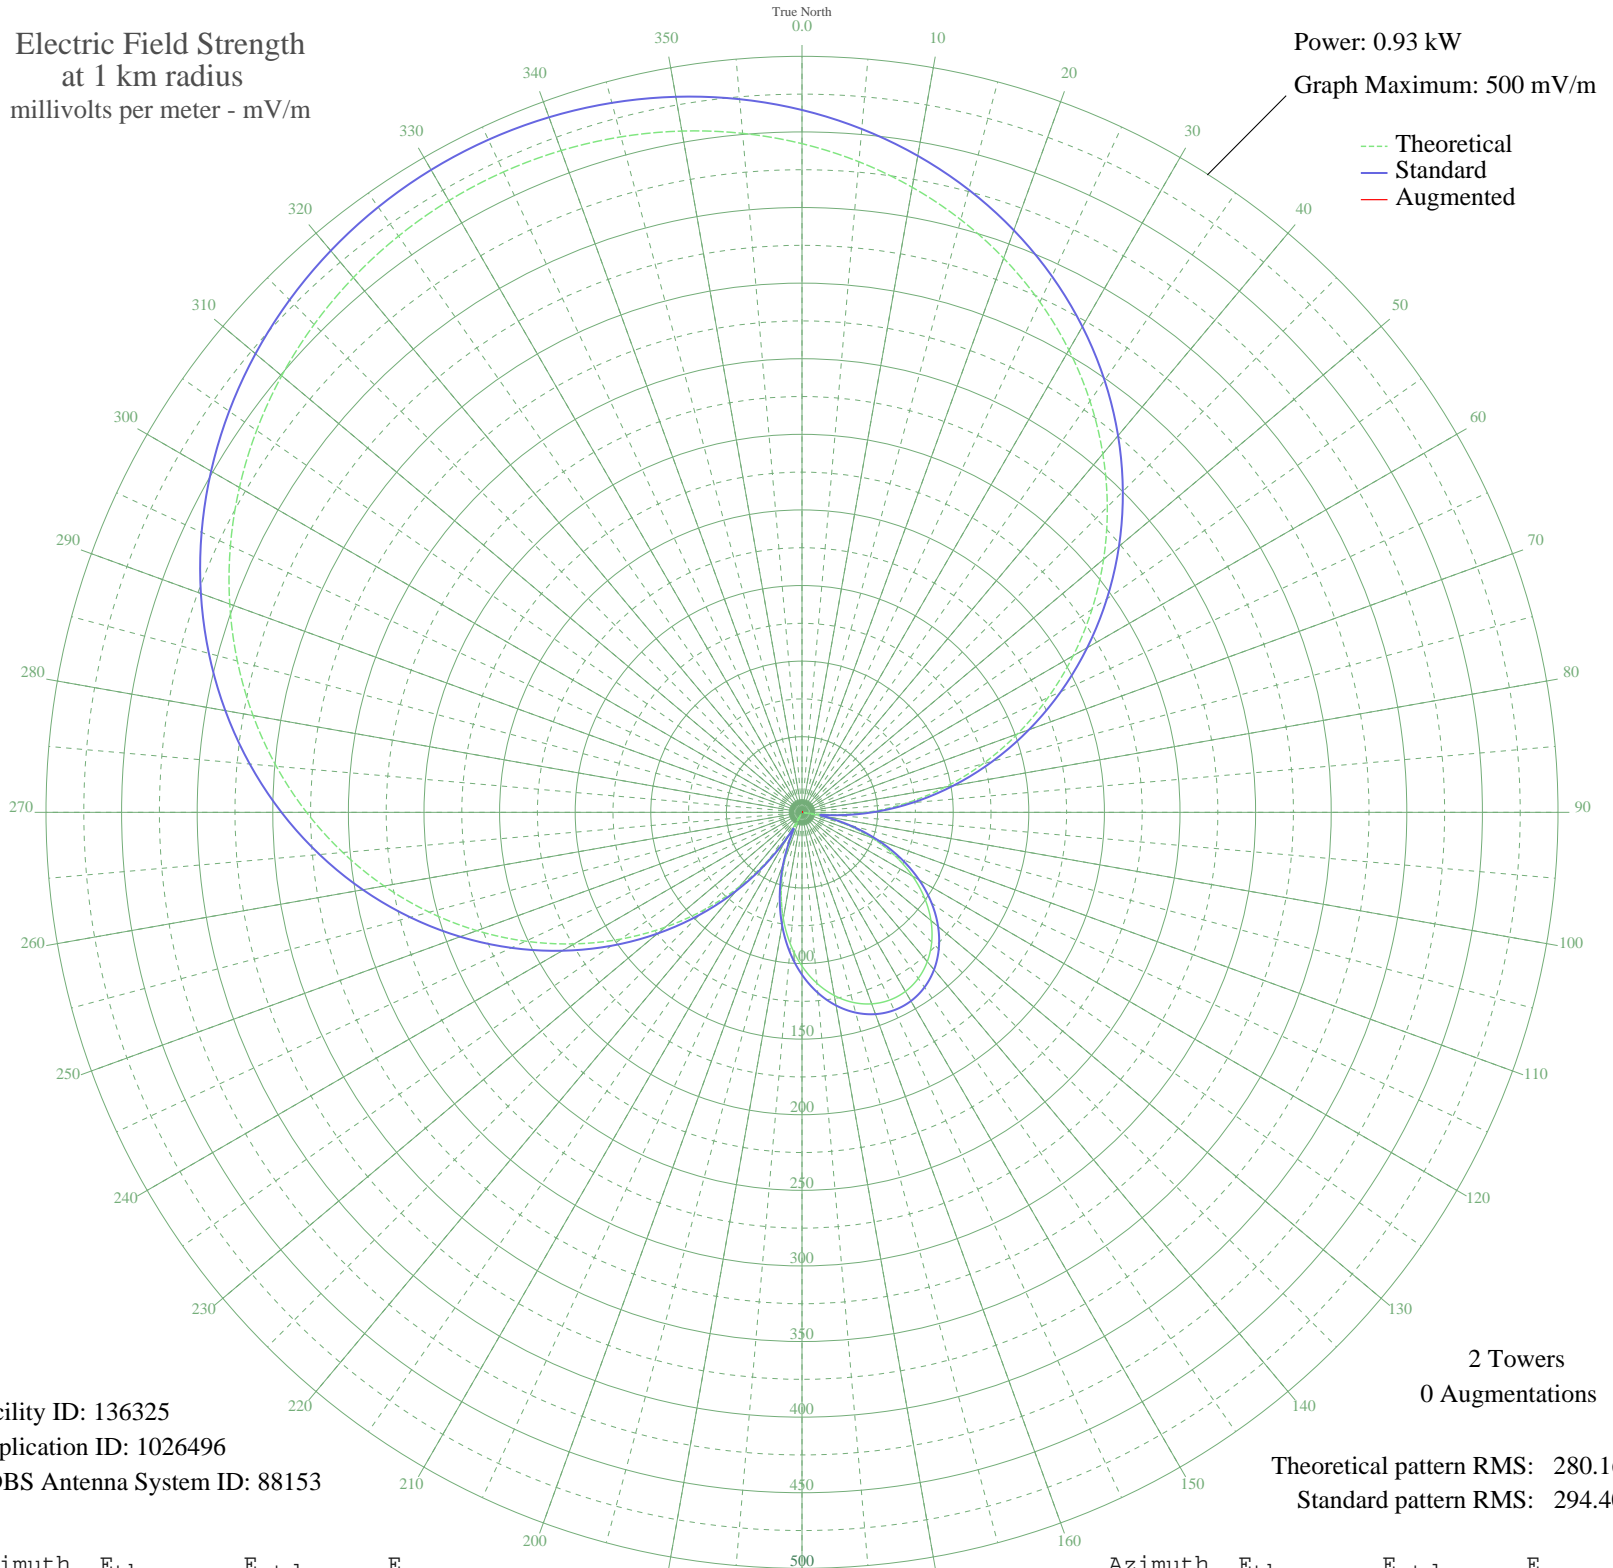

Facility ID: 136325
Application ID: 1026496
CDBS Antenna System ID: 88153

2 Towers
0 Augmentations

Theoretical pattern RMS: 280.16
Standard pattern RMS: 294.40

Azimuth	E _{theo}	E _{std}	E _{aug}
0	442.25	464.51	
5	431.92	453.67	
10	419.77	440.92	
15	405.79	426.24	
20	389.99	409.66	
25	372.39	391.19	
30	353.06	370.90	
35	332.07	348.87	
40	309.52	325.21	
45	285.57	300.08	
50	260.39	273.66	
55	234.17	246.16	
60	207.15	217.82	
65	179.57	188.92	
70	151.71	159.73	
75	123.83	130.55	
80	96.22	101.71	
85	69.15	73.56	
90	42.91	46.56	
95	17.73	22.02	
100	6.14	13.42	
105	28.47	32.13	
110	49.09	52.87	
115	67.82	72.17	
120	84.51	89.51	
125	99.06	104.67	
130	111.35	117.51	
135	121.32	127.93	
140	128.91	135.86	
145	134.07	141.26	
150	136.78	144.10	
155	137.03	144.36	
160	134.81	142.04	
165	130.13	137.15	
170	123.03	129.72	
175	113.53	119.79	

The theoretical pattern is used to create the standard pattern. Augmentations (if any) expand the standard pattern in specified directions. See Sections 73.150 and 73.152 of the FCC's Rules.

AM coverage may not mirror the pattern shown here. Additional factors such as ground conductivity or skywave propagation affect how far the AM signal will travel.

Patterns for stations outside the USA are based on notified parameters.

AM directional patterns created before 1982 used units of 1 mV/m at 1 mile, not one kilometer. The pattern values on such plots at 1 mile will be 0.62137 of the values listed here. Measured pattern values may vary from values shown here.

Plot is best printed on 11" by 17" or larger paper.

20 Nov 2009

Prepared by Audio Division, Media Bureau
Federal Communications Commission

Azimuth	E _{theo}	E _{std}	E _{aug}
180	101.70	107.43	
185	87.60	92.73	
190	71.32	75.81	
195	52.99	56.87	
200	32.74	36.33	
205	10.73	16.29	
210	12.84	17.90	
215	37.78	41.37	
220	63.83	68.05	
225	90.75	96.01	
230	118.28	124.75	
235	146.12	153.88	
240	174.01	183.09	
245	201.67	212.08	
250	228.82	240.55	
255	255.22	268.24	
260	280.63	294.89	
265	304.84	320.30	
270	327.68	344.26	
275	348.99	366.63	
280	368.66	387.28	
285	386.61	406.11	
290	402.78	423.08	
295	417.12	438.14	
300	429.64	451.27	
305	440.33	462.50	
310	449.22	471.82	
315	456.32	479.28	
320	461.65	484.88	
325	465.26	488.66	
330	467.14	490.64	
335	467.31	490.81	
340	465.77	489.20	
345	462.51	485.78	
350	457.52	480.54	
355	450.78	473.46	