


KHNU KALAOA, HI BLEX-19910103AB 620 kHz

Unlimited Time

Electric Field Strength
at 1 km radius
millivolts per meter - mV/m

Power: 10.0 kW
Graph Maximum: 10 mV/m

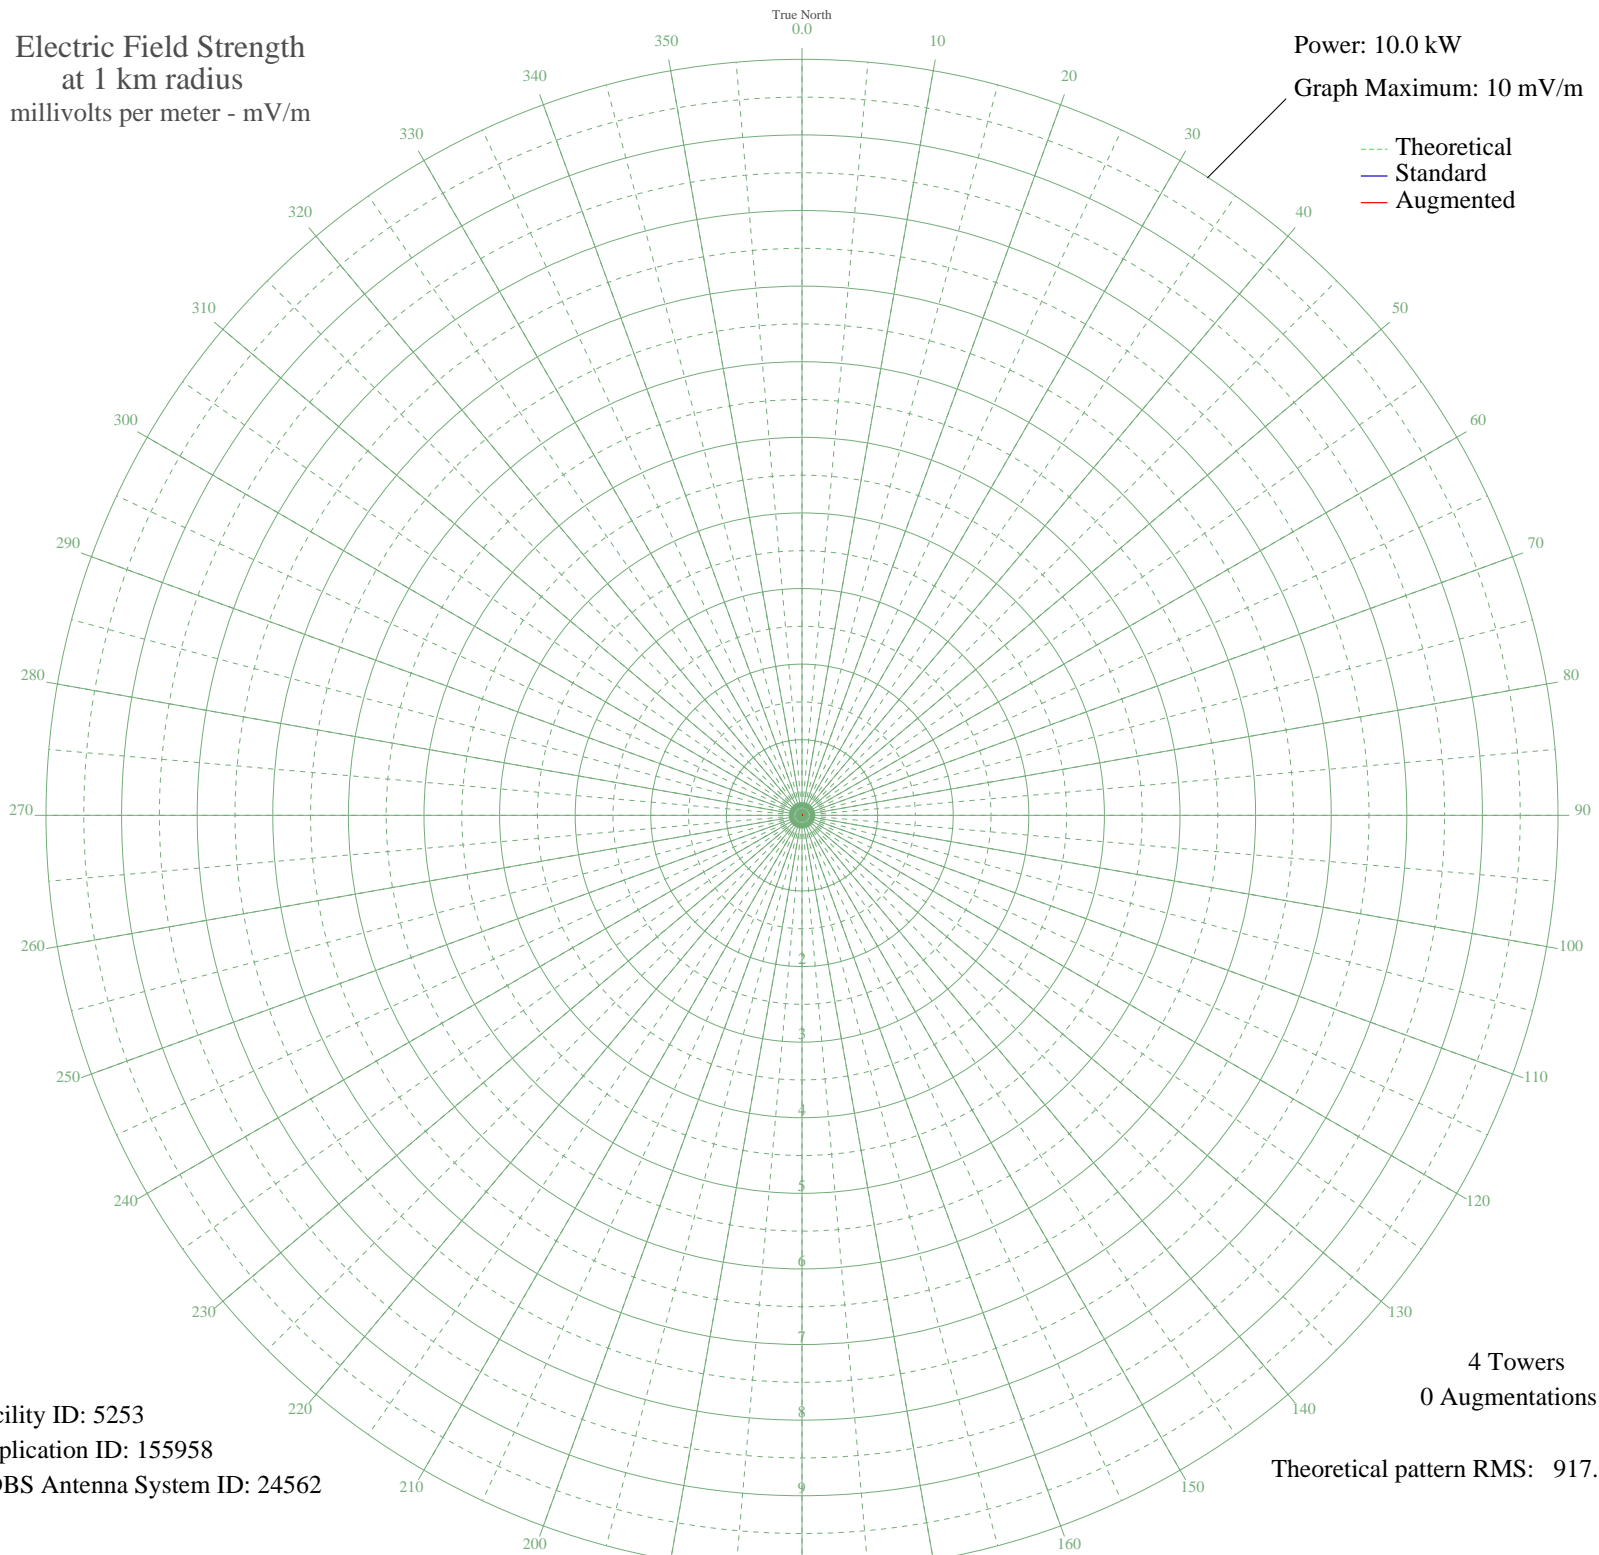

Facility ID: 5253
Application ID: 155958
CDBS Antenna System ID: 24562

4 Towers
0 Augmentations
Theoretical pattern RMS: 917.06

Azimuth	E _{theo}	E _{std}	E _{aug}	Azimuth	E _{theo}	E _{std}	E _{aug}
0	917.04	5226957666419583500000	.00	180	917.04	5226957666419583500000	.00
5	917.04	5226957666419583500000	.00	185	917.04	5226957666419583500000	.00
10	917.04	5226957666419583500000	.00	190	917.04	5226957666419583500000	.00
15	917.05	5226957666419583500000	.00	195	917.05	5226957666419583500000	.00
20	917.06	5226957666419583500000	.00	200	917.06	5226957666419583500000	.00
25	917.06	5226957666419583500000	.00	205	917.06	5226957666419583500000	.00
30	917.07	5226957666419583500000	.00	210	917.07	5226957666419583500000	.00
35	917.07	5226957666419583500000	.00	215	917.07	5226957666419583500000	.00
40	917.08	5226957666419583500000	.00	220	917.08	5226957666419583500000	.00
45	917.08	5226957666419583500000	.00	225	917.08	5226957666419583500000	.00
50	917.08	5226957666419583500000	.00	230	917.08	5226957666419583500000	.00
55	917.07	5226957666419583500000	.00	235	917.07	5226957666419583500000	.00
60	917.07	5226957666419583500000	.00	240	917.07	5226957666419583500000	.00
65	917.06	5226957666419583500000	.00	245	917.06	5226957666419583500000	.00
70	917.06	5226957666419583500000	.00	250	917.06	5226957666419583500000	.00
75	917.05	5226957666419583500000	.00	255	917.05	5226957666419583500000	.00
80	917.04	5226957666419583500000	.00	260	917.04	5226957666419583500000	.00
85	917.04	5226957666419583500000	.00	265	917.04	5226957666419583500000	.00
90	917.04	5226957666419583500000	.00	270	917.04	5226957666419583500000	.00
95	917.04	5226957666419583500000	.00	275	917.04	5226957666419583500000	.00
100	917.05	5226957666419583500000	.00	280	917.05	5226957666419583500000	.00
105	917.05	5226957666419583500000	.00	285	917.05	5226957666419583500000	.00
110	917.06	5226957666419583500000	.00	290	917.06	5226957666419583500000	.00
115	917.06	5226957666419583500000	.00	295	917.06	5226957666419583500000	.00
120	917.07	5226957666419583500000	.00	300	917.07	5226957666419583500000	.00
125	917.08	5226957666419583500000	.00	305	917.08	5226957666419583500000	.00
130	917.08	5226957666419583500000	.00	310	917.08	5226957666419583500000	.00
135	917.08	5226957666419583500000	.00	315	917.08	5226957666419583500000	.00
140	917.08	5226957666419583500000	.00	320	917.08	5226957666419583500000	.00
145	917.08	5226957666419583500000	.00	325	917.08	5226957666419583500000	.00
150	917.07	5226957666419583500000	.00	330	917.07	5226957666419583500000	.00
155	917.06	5226957666419583500000	.00	335	917.06	5226957666419583500000	.00
160	917.06	5226957666419583500000	.00	340	917.06	5226957666419583500000	.00
165	917.05	5226957666419583500000	.00	345	917.05	5226957666419583500000	.00
170	917.05	5226957666419583500000	.00	350	917.05	5226957666419583500000	.00
175	917.04	5226957666419583500000	.00	355	917.04	5226957666419583500000	.00

The theoretical pattern is used to create the standard pattern. Augmentations (if any) expand the standard pattern in specified directions. See Sections 73.150 and 73.152 of the FCC's Rules. AM coverage may not mirror the pattern shown here. Additional factors such as ground conductivity or skywave propagation affect how far the AM signal will travel. Patterns for stations outside the USA are based on notified parameters. AM directional patterns created before 1982 used units of 1 mV/m at 1 mile, not one kilometer. The pattern values on such plots at 1 mile will be 0.62137 of the values listed here. Measured pattern values may vary from values shown here. Plot is best printed on 11" by 17" or larger paper.

31 Aug 2008

Prepared by Audio Division, Media Bureau
Federal Communications Commission