


# KFEQ ST. JOSEPH, MO BL-7559 680 kHz

Nighttime

Electric Field Strength  
at 1 km radius  
millivolts per meter - mV/m

Power: 5.0 kW  
Graph Maximum: 2000 mV/m

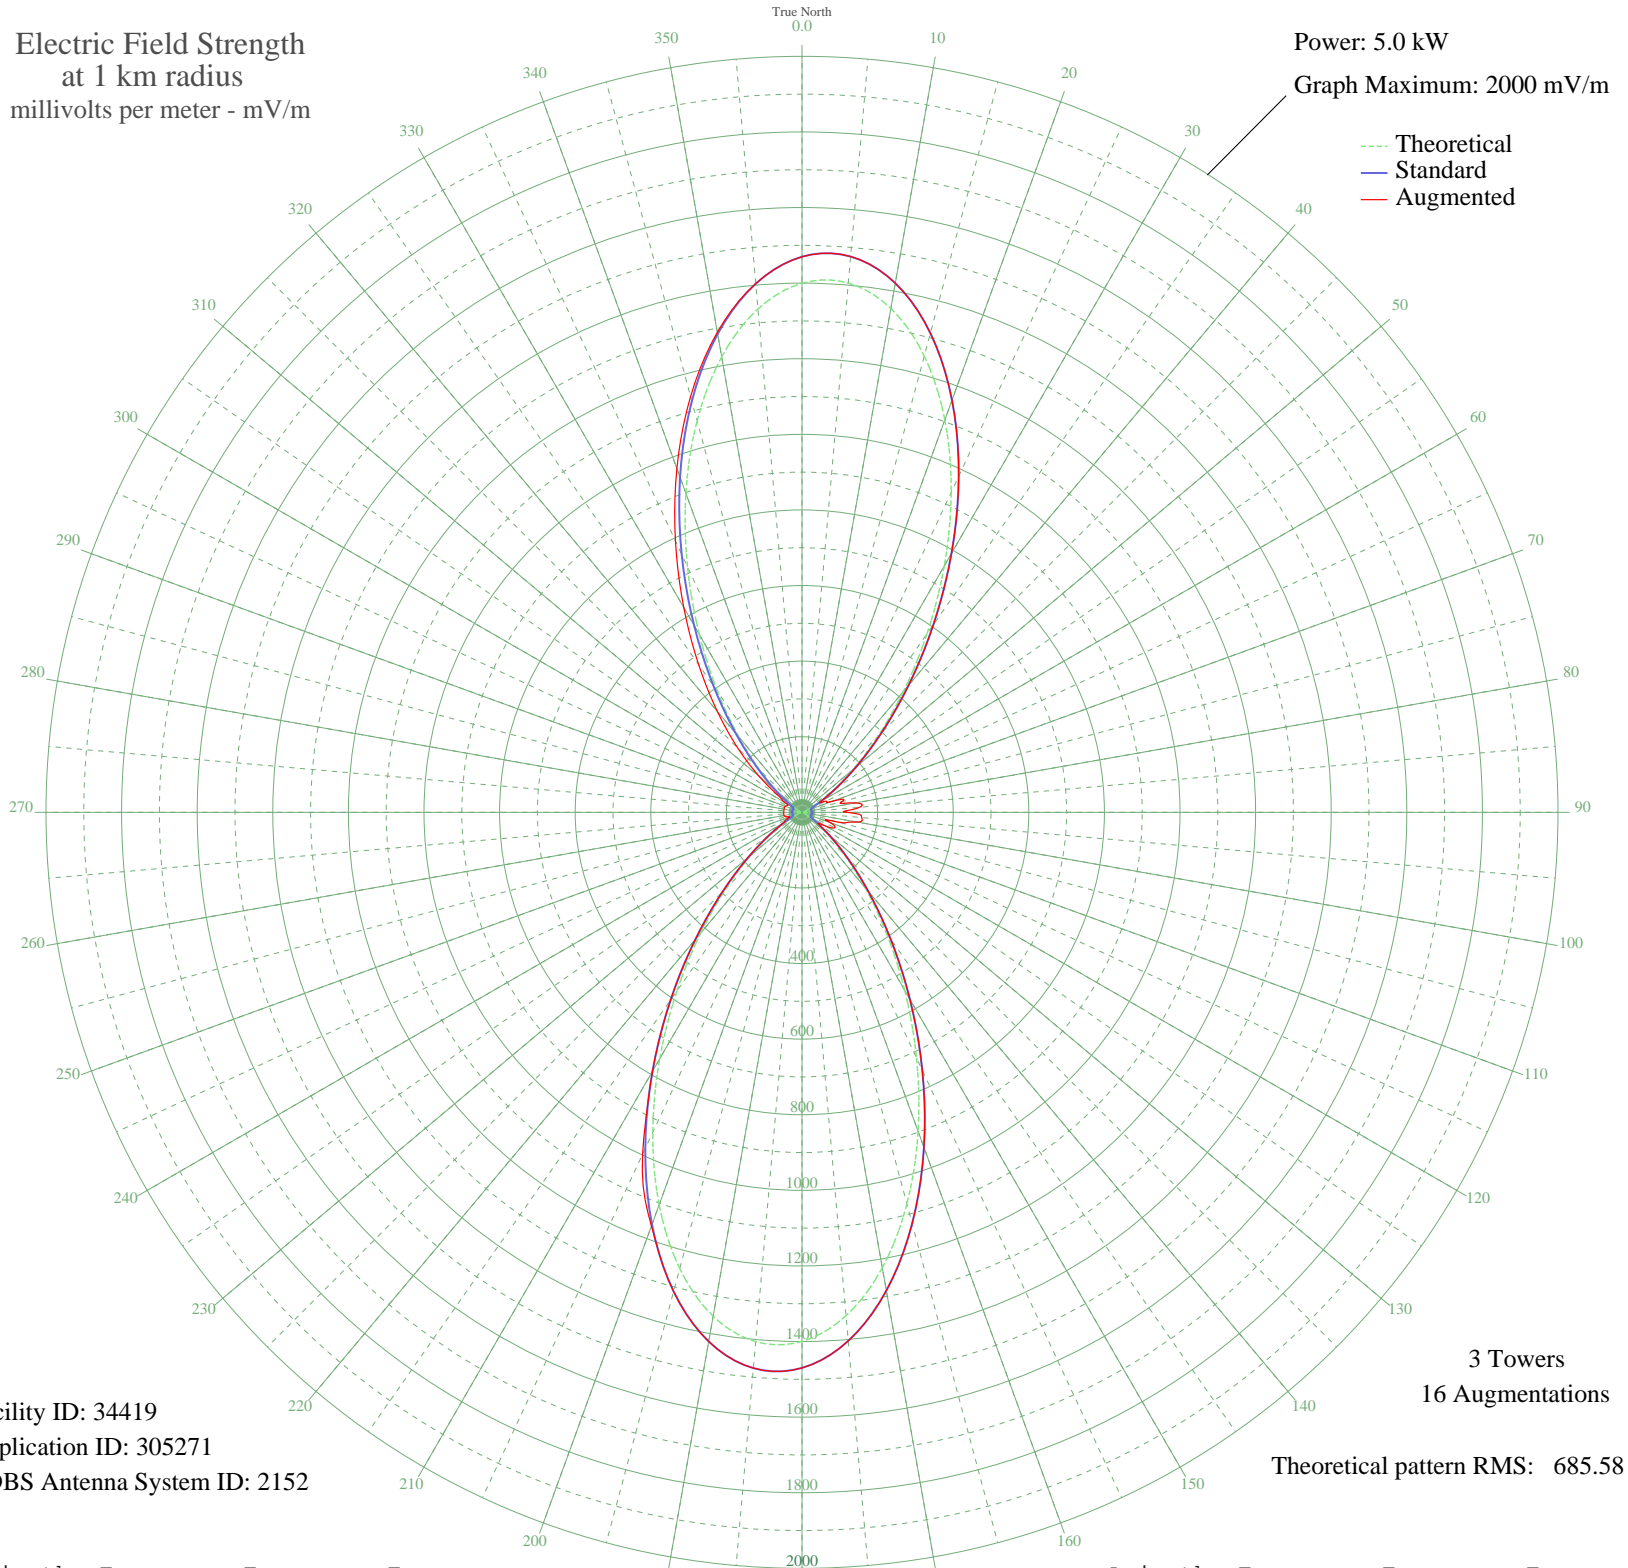

Facility ID: 34419  
Application ID: 305271  
CDBS Antenna System ID: 2152

3 Towers  
16 Augmentations  
Theoretical pattern RMS: 685.58

Azimuth	Etheo	Estd	Eaug
0	1399.65	1469.82	1469.82
5	1405.51	1475.97	1475.97
10	1353.57	1421.44	1421.44
15	1249.61	1312.30	1312.30
20	1104.82	1160.30	1160.30
25	933.95	980.93	980.93
30	752.95	790.95	790.95
35	576.69	605.98	605.98
40	417.20	438.69	438.69
45	282.57	297.63	297.63
50	176.73	187.04	187.04
55	99.82	107.41	107.41
60	49.09	56.64	56.64
65	19.89	31.42	69.91
70	6.69	24.51	86.22
75	3.96	23.84	108.26
80	6.72	24.52	143.69
85	11.01	26.17	153.38
90	14.04	27.72	119.34
95	14.34	27.89	158.54
100	11.78	26.54	148.26
105	7.57	24.79	101.80
110	4.22	23.89	80.05
115	5.48	24.17	96.38
120	16.15	28.96	74.23
125	41.70	49.68	51.29
130	87.71	95.04	95.04
135	159.09	168.68	168.68
140	259.05	273.01	273.01
145	388.10	408.18	408.18
150	543.13	570.77	570.77
155	716.88	753.09	753.09
160	898.06	943.25	943.25
165	1072.23	1126.08	1126.08
170	1223.48	1284.87	1284.87
175	1336.65	1403.68	1403.68

The theoretical pattern is used to create the standard pattern. Augmentations (if any) expand the standard pattern in specified directions. See Sections 73.150 and 73.152 of the FCC's Rules.

AM coverage may not mirror the pattern shown here. Additional factors such as ground conductivity or skywave propagation affect how far the AM signal will travel.

Patterns for stations outside the USA are based on notified parameters.

AM directional patterns created before 1982 used units of 1 mV/m at 1 mile, not one kilometer. The pattern values on such plots at 1 mile will be 0.62137 of the values listed here. Measured pattern values may vary from values shown here.

Plot is best printed on 11" by 17" or larger paper.

20 Nov 2009

Prepared by Audio Division, Media Bureau  
Federal Communications Commission

Azimuth	Etheo	Estd	Eaug
180	1399.65	1469.82	1469.82
185	1405.51	1475.97	1475.97
190	1353.57	1421.44	1421.44
195	1249.61	1312.30	1312.30
200	1104.82	1160.30	1164.67
205	933.95	980.93	997.90
210	752.95	790.94	790.94
215	576.69	605.98	605.98
220	417.20	438.69	438.69
225	282.57	297.63	297.63
230	176.73	187.04	187.04
235	99.82	107.41	107.41
240	49.09	56.64	57.43
245	19.89	31.42	48.28
250	6.69	24.51	34.40
255	3.96	23.84	44.52
260	6.72	24.52	48.37
265	11.01	26.17	48.47
270	14.04	27.72	48.32
275	14.34	27.89	48.24
280	11.78	26.54	47.98
285	7.57	24.79	48.08
290	4.22	23.89	47.40
295	5.48	24.17	42.63
300	16.15	28.96	53.20
305	41.70	49.68	74.93
310	87.71	95.04	147.16
315	159.09	168.68	239.75
320	259.05	273.01	348.38
325	388.10	408.18	476.38
330	543.14	570.78	625.39
335	716.88	753.10	792.13
340	898.06	943.25	967.76
345	1072.23	1126.08	1138.89
350	1223.48	1284.87	1289.65
355	1336.65	1403.68	1404.33