


# KFXN MINNEAPOLIS, MN BL-- 690 kHz

Nighttime

Electric Field Strength  
at 1 km radius  
millivolts per meter - mV/m

Power: 0.004 kW  
Graph Maximum: 50 mV/m

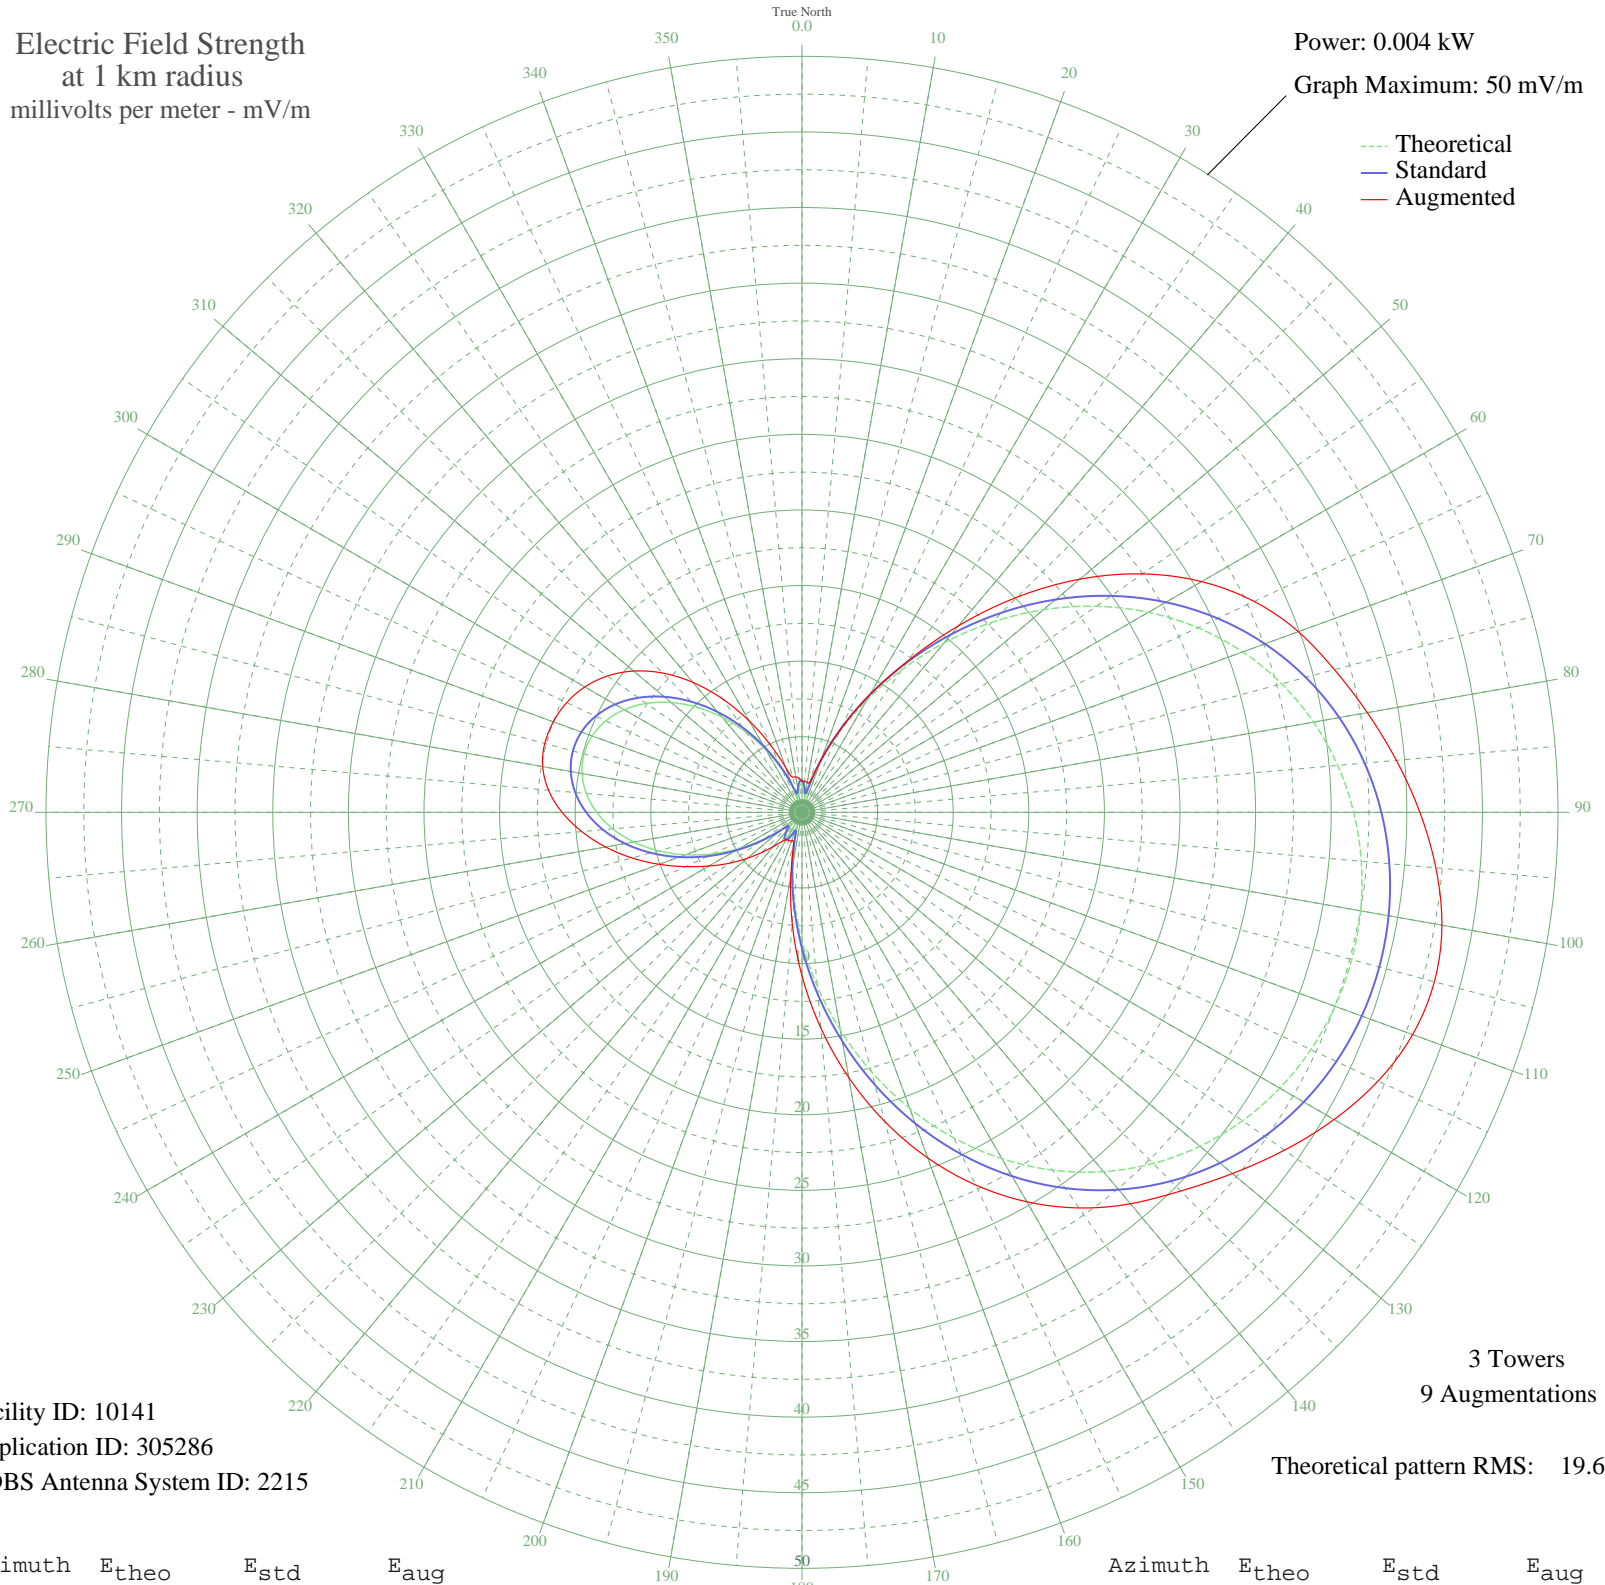

Facility ID: 10141  
Application ID: 305286  
CDBS Antenna System ID: 2215

3 Towers  
9 Augmentations

Theoretical pattern RMS: 19.65

Azimuth	E <sub>theo</sub>	E <sub>std</sub>	E <sub>aug</sub>
0	1.86	2.09	2.09
5	1.51	1.75	2.06
10	0.97	1.26	2.00
15	1.62	1.86	2.16
20	3.44	3.69	3.69
25	5.80	6.14	6.14
30	8.53	8.99	8.99
35	11.51	12.11	12.25
40	14.63	15.38	16.12
45	17.77	18.67	20.13
50	20.84	21.90	23.99
55	23.76	24.96	27.50
60	26.46	27.79	30.52
65	28.89	30.34	33.00
70	31.02	32.58	34.94
75	32.84	34.49	36.46
80	34.36	36.08	37.96
85	35.57	37.35	39.46
90	36.49	38.32	40.87
95	37.13	39.00	42.08
100	37.51	39.40	42.98
105	37.64	39.53	43.30
110	37.51	39.40	42.98
115	37.13	39.00	42.04
120	36.49	38.32	40.64
125	35.57	37.35	38.95
130	34.36	36.08	37.16
135	32.84	34.49	35.42
140	31.02	32.58	33.80
145	28.89	30.34	31.94
150	26.46	27.79	29.74
155	23.76	24.96	27.20
160	20.84	21.90	24.33
165	17.77	18.67	21.18
170	14.63	15.38	17.81
175	11.51	12.11	14.32

The theoretical pattern is used to create the standard pattern. Augmentations (if any) expand the standard pattern in specified directions. See Sections 73.150 and 73.152 of the FCC's Rules.

AM coverage may not mirror the pattern shown here. Additional factors such as ground conductivity or skywave propagation affect how far the AM signal will travel.

Patterns for stations outside the USA are based on notified parameters.

AM directional patterns created before 1982 used units of 1 mV/m at 1 mile, not one kilometer. The pattern values on such plots at 1 mile will be 0.62137 of the values listed here. Measured pattern values may vary from values shown here.

Plot is best printed on 11" by 17" or larger paper.

03 Jul 2009

Prepared by Audio Division, Media Bureau  
Federal Communications Commission

Azimuth	E <sub>theo</sub>	E <sub>std</sub>	E <sub>aug</sub>
180	8.53	8.99	10.81
185	5.80	6.14	7.40
190	3.44	3.69	4.25
195	1.62	1.86	2.16
200	0.97	1.26	2.00
205	1.51	1.75	2.06
210	1.86	2.09	2.09
215	1.78	2.01	2.39
220	1.33	1.58	2.96
225	0.95	1.25	3.75
230	1.68	1.91	4.73
235	3.09	3.33	5.87
240	4.75	5.04	7.10
245	6.48	6.85	8.50
250	8.21	8.65	10.05
255	9.83	10.35	11.65
260	11.30	11.89	13.19
265	12.56	13.21	14.62
270	13.58	14.27	15.87
275	14.32	15.05	16.83
280	14.77	15.53	17.41
285	14.92	15.69	17.61
290	14.77	15.53	17.50
295	14.32	15.05	17.17
300	13.58	14.27	16.59
305	12.56	13.21	15.72
310	11.30	11.89	14.54
315	9.83	10.35	13.03
320	8.21	8.65	11.22
325	6.48	6.85	9.16
330	4.75	5.04	6.98
335	3.09	3.33	4.88
340	1.68	1.91	3.15
345	0.95	1.25	2.40
350	1.33	1.58	2.38
355	1.78	2.01	2.26