


WROS JACKSONVILLE, FL BL-14465 1050 kHz

Daytime

Electric Field Strength
at 1 km radius
millivolts per meter - mV/m

Power: 5.0 kW
Graph Maximum: 2000 mV/m

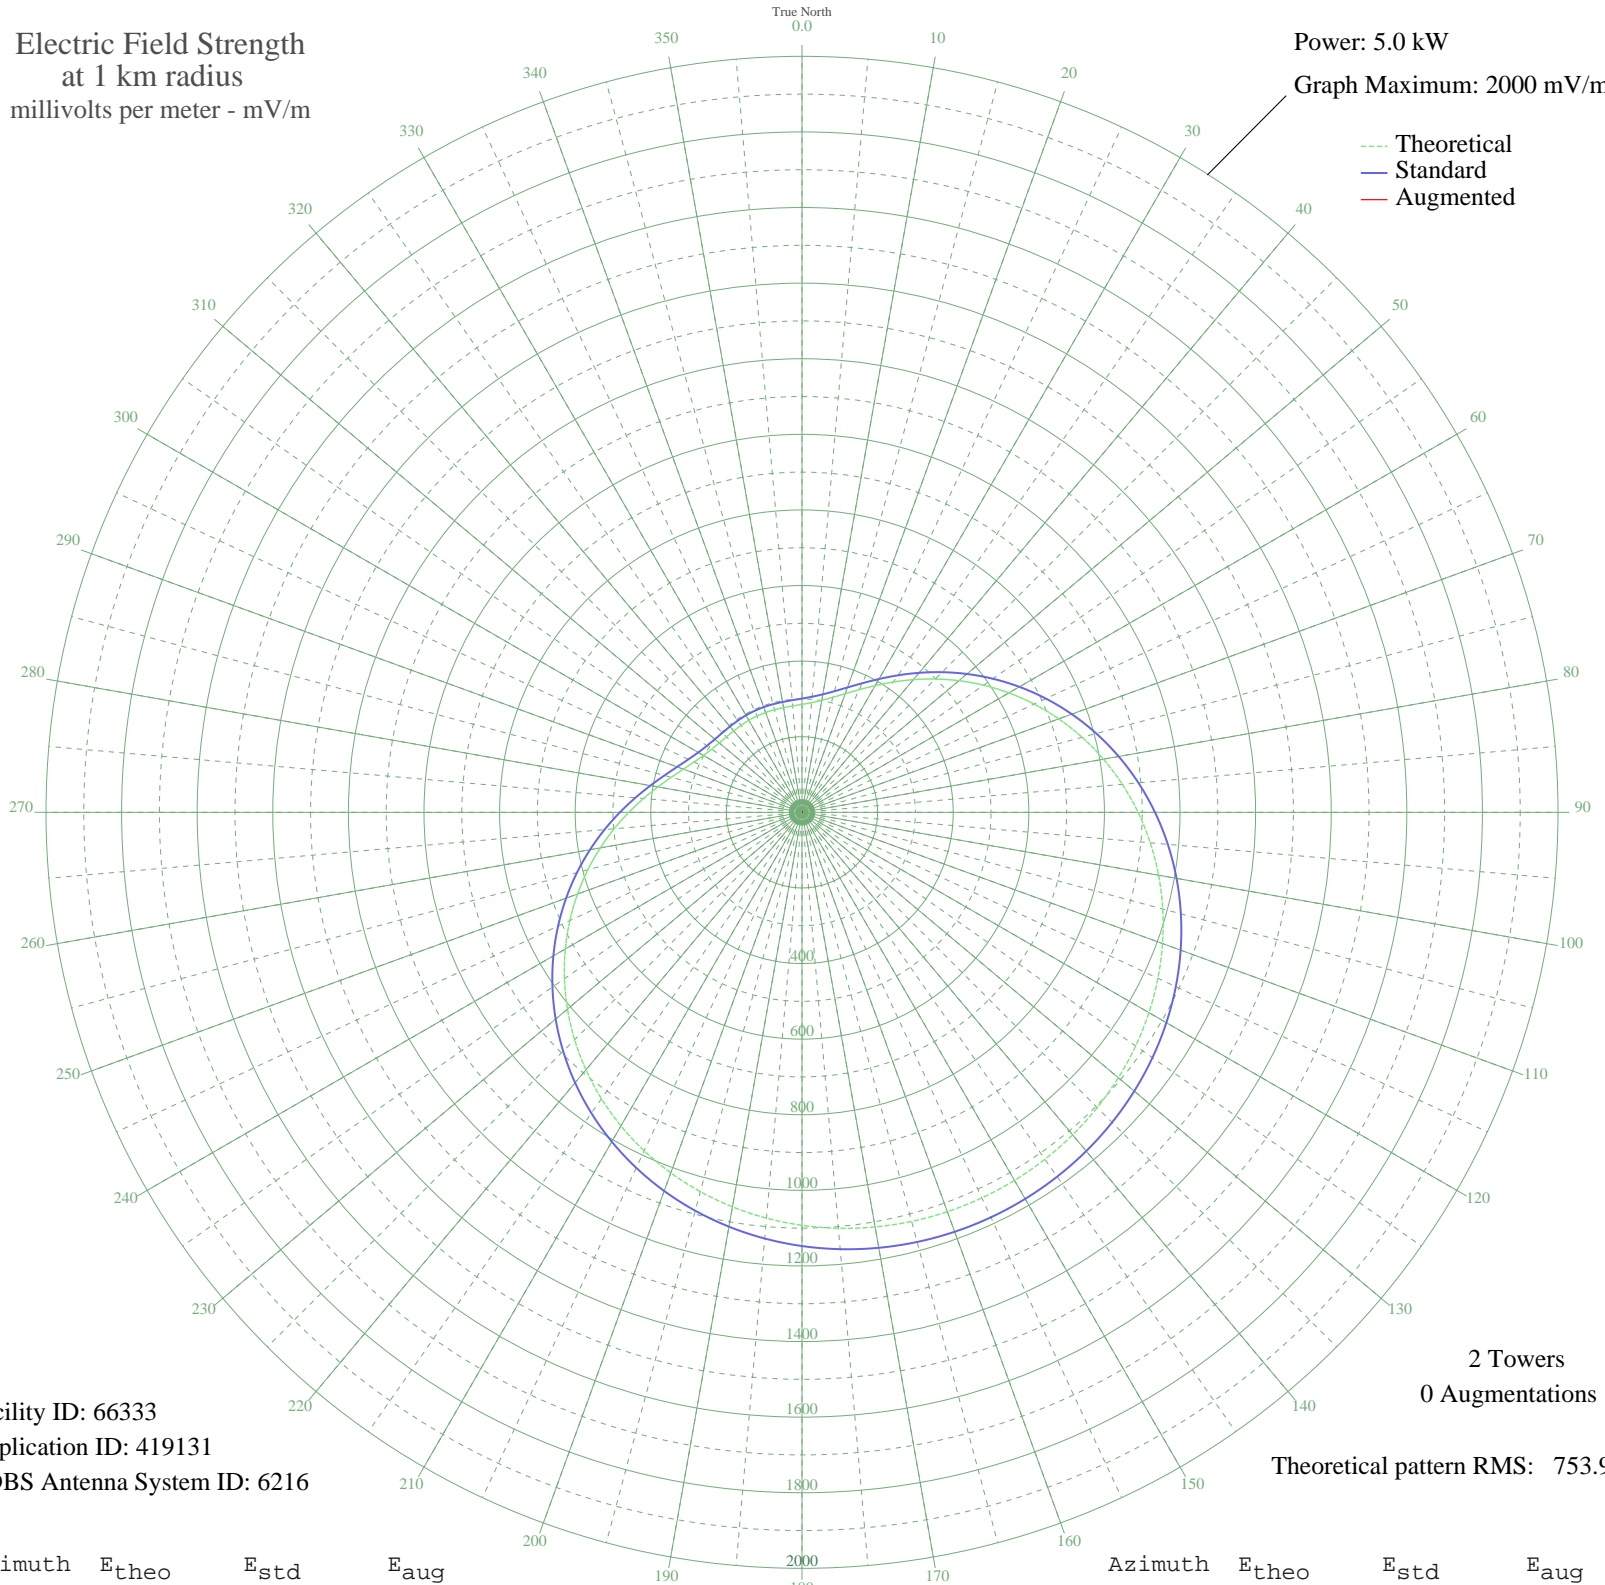

Facility ID: 66333
Application ID: 419131
CDBS Antenna System ID: 6216

2 Towers
0 Augmentations

Theoretical pattern RMS: 753.98

Azimuth	E _{theo}	E _{std}	E _{aug}
0	285.58	300.91	
5	291.41	307.01	
10	300.94	316.98	
15	314.94	331.65	
20	333.93	351.53	
25	358.05	376.79	
30	387.12	407.25	
35	420.70	442.45	
40	458.17	481.73	
45	498.78	524.32	
50	541.79	569.43	
55	586.42	616.26	
60	631.94	664.02	
65	677.66	711.99	
70	722.93	759.49	
75	767.18	805.93	
80	809.90	850.77	
85	850.66	893.54	
90	889.09	933.88	
95	924.92	971.49	
100	957.92	1006.13	
105	987.97	1037.67	
110	1014.97	1066.01	
115	1038.89	1091.13	
120	1059.76	1113.03	
125	1077.61	1131.77	
130	1092.53	1147.43	
135	1104.58	1160.08	
140	1113.85	1169.81	
145	1120.42	1176.70	
150	1124.33	1180.81	
155	1125.63	1182.18	
160	1124.33	1180.81	
165	1120.42	1176.70	
170	1113.85	1169.81	
175	1104.58	1160.08	

The theoretical pattern is used to create the standard pattern. Augmentations (if any) expand the standard pattern in specified directions. See Sections 73.150 and 73.152 of the FCC's Rules.

AM coverage may not mirror the pattern shown here. Additional factors such as ground conductivity or skywave propagation affect how far the AM signal will travel.

Patterns for stations outside the USA are based on notified parameters.

AM directional patterns created before 1982 used units of 1 mV/m at 1 mile, not one kilometer. The pattern values on such plots at 1 mile will be 0.62137 of the values listed here. Measured pattern values may vary from values shown here.

Plot is best printed on 11" by 17" or larger paper.

03 Jul 2009

Prepared by Audio Division, Media Bureau
Federal Communications Commission

Azimuth	E _{theo}	E _{std}	E _{aug}
180	1092.53	1147.43	
185	1077.62	1131.77	
190	1059.76	1113.03	
195	1038.89	1091.13	
200	1014.97	1066.01	
205	987.97	1037.67	
210	957.92	1006.13	
215	924.92	971.49	
220	889.09	933.88	
225	850.66	893.54	
230	809.90	850.77	
235	767.18	805.93	
240	722.93	759.49	
245	677.66	711.99	
250	631.94	664.02	
255	586.42	616.26	
260	541.79	569.43	
265	498.78	524.32	
270	458.17	481.73	
275	420.70	442.45	
280	387.12	407.25	
285	358.05	376.79	
290	333.93	351.53	
295	314.94	331.65	
300	300.94	316.98	
305	291.41	307.01	
310	285.58	300.91	
315	282.51	297.70	
320	281.27	296.40	
325	281.01	296.13	
330	281.12	296.24	
335	281.20	296.33	
340	281.12	296.24	
345	281.01	296.13	
350	281.27	296.40	
355	282.51	297.70	